

Floodlight

ZFFI09-01

Part Number

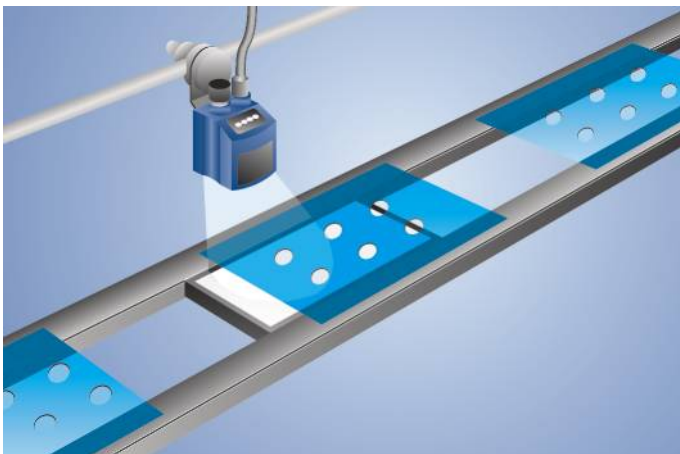


- Diffuse illumination with incident light mode
- Especially for through-beam operating mode
- Flash mode synchronizable with image processing

Technical Data

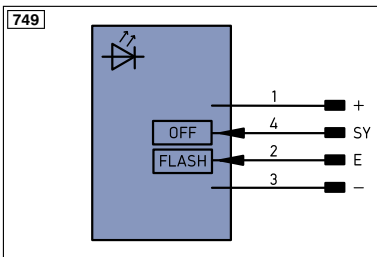
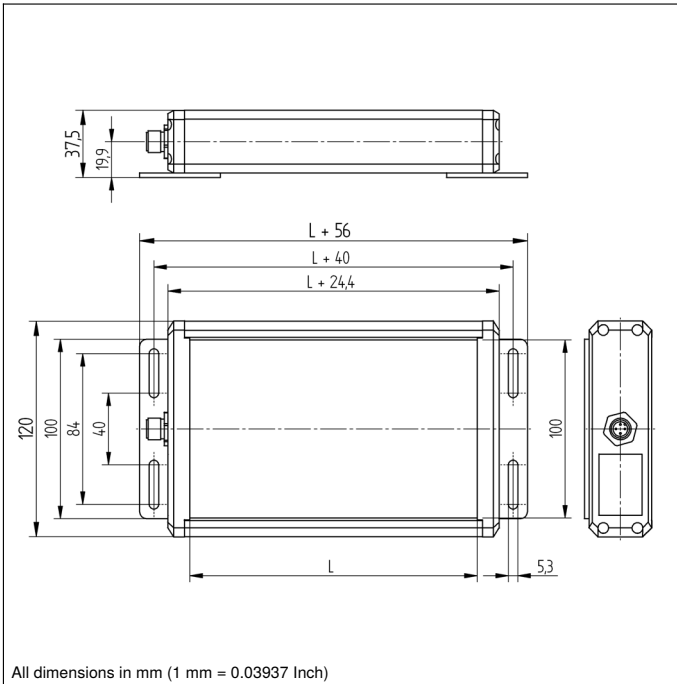
Optical Data	
Light Source	Infrared Light
Wavelength	850 nm
Radiance (Continuous Mode)	~ 3,8 W/m ² sr
Radiance (Flash Mode)	~ 12,9 W/m ² sr
Electrical Data	
Supply Voltage	22...27 V DC
Temperature Range	0...50 °C
Reverse Polarity Protection	yes
Protection Class	III
Mechanical Data	
Luminous Field Length (L)	80 mm
Housing Material	Aluminum
Degree of Protection	IP42
Connection	M12 × 1; 4-pin
Connection Diagram No.	749
Connection Table No.	32
Suitable Connection Equipment No.	2


The wenglor floodlight can be used either with through-beam or incident light operating mode. Transparent and reflective objects as well as object contours are illuminated well.



Complementary Products

Connection Cable BG2BSW1-08M, ZAV89V901, ZDCG001
Polarization Filter ZNNG008, ZVP0F0901


Legend

+ Supply Voltage +	PT Platinum measuring resistor	EN^{A/RS422} Encoder A/ \bar{A} (TTL)
- Supply Voltage 0 V	nc not connected	EN^{B/RS422} Encoder B/ \bar{B} (TTL)
~ Supply Voltage (AC Voltage)	U Test Input	EN^A Encoder A
A Switching Output (NO)	\bar{U} Test Input inverted	EN^B Encoder B
\bar{A} Switching Output (NC)	W Trigger Input	A^{MIN} Digital output MIN
V Contamination/Error Output (NO)	W- Ground for the Trigger Input	A^{MAX} Digital output MAX
\bar{V} Contamination/Error Output (NC)	O Analog Output	A^{OK} Digital output OK
E Input (analog or digital)	O- Ground for the Analog Output	SY^{In} Synchronization In
T Teach Input	BZ Block Discharge	SY^{OUT} Synchronization OUT
Z Time Delay (activation)	A^{WV} Valve Output	OL^T Brightness output
S Shielding	a Valve Control Output +	M Maintenance
RxD Interface Receive Path	b Valve Control Output 0 V	rsv reserved
TxD Interface Send Path	SY Synchronization	Wire Colors according to DIN IEC 757
RDY Ready	SY- Ground for the Synchronization	BK Black
GND Ground	E+ Receiver-Line	BN Brown
CL Clock	S+ Emitter-Line	RD Red
E/A Output/Input programmable	\pm Grounding	OG Orange
 IO-Link	S^{nR} Switching Distance Reduction	YE Yellow
PoE Power over Ethernet	Rx+/- Ethernet Receive Path	GN Green
IN Safety Input	Tx+/- Ethernet Send Path	BU Blue
OSSD Safety Output	Bus Interfaces-Bus A(+)/B(-)	VT Violet
Signal Signal Output	L^a Emitted Light disengageable	GY Grey
Bl^{-D}+/- Ethernet Gigabit bidirect. data line (A-D)	Mag Magnet activation	WH White
EN^{0/RS422} Encoder 0-pulse 0-0 (TTL)	RES Input confirmation	PK Pink
	EDM Contactor Monitoring	GN^{YE} Green/Yellow

